

ROOF TREATMENT

ROOF TREATMENT



FEATURES:


- **EXCELLENT UV PROTECTION:** Unique UV absorbers and enhanced micronized pigments protect the wood shakes and shingles from the sun's UV rays.
- **LOW VOC FORMULA:** ROOF TREATMENT is not harmful to the environment.
- **SUITABLE FOR UNSEASONED WOOD:** The unique formula allows for use on shakes or shingles with higher moisture content (21% or less).
- **BREATHABLE FINISH:** ROOF TREATMENT'S breathability reduces moisture build up in wood and stabilizes wood to reduce warping and checking.
- **EASY TO APPLY:** ROOF TREATMENT can easily be applied by brush, sprayed and back brushed, flood coated or machine application in pre-finish shops.
- **EASY TO MAINTAIN:** The unique formula does not peel, flake or blister. No sanding is required prior to the maintenance coat. Simply wash the surface, let dry and apply a single application of ROOF TREATMENT to keep the wood shakes and shingles protected and beautiful.
- **EASY CLEAN UP:** Soap and water clean up.

ROOF TREATMENT

Protects + Beautifies

- **SHINGLES - Split or Sawn**
- **SHAKES - Split or Sawn**

Timber Pro ROOF TREATMENT is a specialized professional grade wood finish used in the industry by roofers, manufacturers, crafters, timber framers, contractors, and pre-finish operations. ROOF TREATMENT is for use on all wood species used to create wood roofs, shingles and shakes, rough sawn or split. Wood roof manufacturers and installers choose Timber Pro ROOF TREATMENT because it preserves the natural beauty and integrity of their clients' investment. Timber Pro ROOF TREATMENT is environmentally safe, easy to use and simple to maintain.

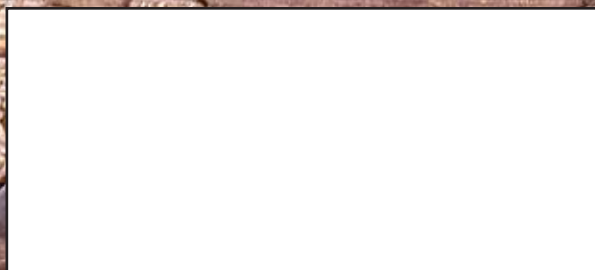

DEALER STAMP

604.270.4244
timberprocoatings.ca



ROOF TREATMENT

Protects + Beautifies

Where to Use

Timber Pro ROOF TREATMENT can be used on all new and reconditioned wood surfaces. ROOF TREATMENT can be used on wood species such as cedar, fir, pine, cypress, redwood, spruce exterior grade plywood, pressure treated and thermally modified wood. ROOF TREATMENT can be used for:

- Split or sawn shakes • Split or sawn shingles

RESTRICTIONS

- Always read and follow the “Directions for Use” instructions printed on the product container, brochure and/or on website www.timberprocoatings.ca
- Do not apply in direct sunlight or temperatures below 10C (50F) or above 25C (80F)
- Do not apply on surfaces hot to the touch
- Do not thin the product
- Do not apply over previously coated surfaces

Application

- Do a colour test prior to proceeding with the entire job.
- Apply one saturated coat of tinted or clear Roof Treatment, a second coat can be applied if desired. The second coat can be tinted or clear.
- Check the moisture content of wood. Apply coating when surface moisture content is less than 21%.
- Stir the material thoroughly before and occasionally during use.
- Application is best with a quality nylon/polyester brush or with an airless sprayer and back brushed immediately after.
- Wood shakes and shingles may be pre-finished with one or two coats of ROOF TREATMENT before installation. Back priming is recommended.
- Generously coat the surface and all exposed end grain. Apply as liberally as possible without runs. Do not try to stretch coverage. Apply in the direction of the grain and/or shake/shingle direction. If spraying, spray until the product runs slightly and then immediately back brush. Avoid lap marks by starting at one end of a given surface, and while maintaining a wet edge, follow through to the opposite end of the surface area. It is extremely important to allow each coat to dry before proceeding with the next coat if desired or required.

Clean Up

Wash with soap/mild detergent and water

Coverage

Smooth wood: 250-300 square feet per gallon.
Rough wood: 150-200 square feet per gallon.
Hardwoods: 300-350 square feet per gallon.
Note: Coverage will vary with the porosity of the wood.

THE COMPLETE LINE OF TIMBER PRO PRODUCTS

Log+Siding
Ultra DF
Roof Treatment
Yard Treatment

Ultra LS
Crystal Urethane
Strip+Brite
EZ PRO

Deck+Fence
Timber Seal
Interior Stain Formula
Base Coat

XP
Clean+Brite